

TECHNICAL SPECIFICATION

(from series 2018 on)




BeachTech 3000

Data Sheet

Cleaning method		BeachTech 3000
	patented	raking-screening-mixed technique
Tractor requirements		
	power output	from 74 kW / 100 PS
	4-wheel-drive	
	differential lock	
	high flotation tires, width	500 mm front, 600 mm back
	drawbar for towing eyes Ø 40 mm, adjustable up to approx.	1 m height
	PTO shaft stub	26, 1 3/8"
	power take-off AR NORM	1.000 rpm
	supported load	1.500 kg
	electrical circuit	standardized socket, 12 V
Dimensions		
length	waste container in operational	7.000 mm
	with waste container on top	5.700 mm
width	with standard tires	2.700 mm
	incl. finisher	2.800 mm
height	working width	2.500 mm
	vehicle	2.250 mm
	discharge of dump body	1.550 mm
Tires		
	low-pressure tires, wide	500/60-22.5
Weight		
	net weight	3.200 kg
	gross weight limit up to*	6.200 kg
Tank capacity		
	hydraulic oil	40 l
Performance		
	ground coverage up to	30.000 m ² /h
Working depth		
	up to**	30 cm
Screen surface		
	screening belt	+/- 7 m ²
Capacity		
	collecting hopper	0,7 m ³
	dump body	4,0 m ³
Speed		
	max. working speed**	12 km/h
	traffic*	25 km/h // 40 km/h

Specifications * according to local traffic regulations; ** depending on nature of the ground; Optional road licensing, according to local traffic regulations, possible.

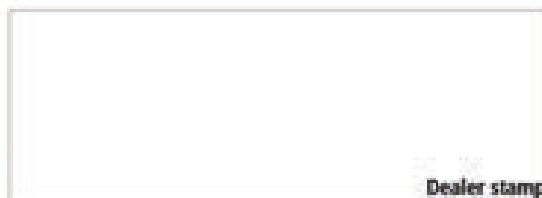

Dealer stamp

BeachTech

Tel.: +49 7392 900 - 461
 Email: info@beach-tech.com
 www.beach-tech.com

The possibility of changes to the product after the editorial closing date for this publication cannot be ruled out.